

U8903B

Performance audio analyzer

Introduction

Make multi-functional and higher-performance audio measurements with the U8903B audio analyzer. With the extremely low residual distortion of < -110 dB, the U8903B allows you to measure the most demanding audio devices with high accuracy. Perform audio measurements by making the highest resolution two-channel measurements available when you expand your bandwidth to 1.5 MHz with an option or more, the U8903B audio analyzer offers you a configurable audio test solution to meet your specific audio application needs.



Key features

- Test low distortion devices with low residual distortion of < -110 dB
- Expand your measurement bandwidth (with the wide bandwidth option N3431A) to measure from 10 Hz to a maximum of 1.5 MHz
- Perform speech and audio quality measurements with Perceptual Objective Listening Quality Assessment (POLQA)
- Configure the U8903B up to 8 analog analyzer channels
- Implement automatic test with the test sequence function
- Characterize Signal-to-Noise Ratios, SINAD, IMD, DFD, THD ratio, THD+N level, crosstalk, and more
- Apply weighing functions, standard filters, and custom filters, including notch filter features
- Configure your unit with the digital audio interface option, offering AES3/SPDIF and DSI standard digital audio formats
- Test a variety of current components and applications with a logic level input range of 1.2 V to 3.3 V (DSI)
- Eliminate the need to rewrite programs into the SCPI command with the built-in compatibility mode.

Expand Your Options to Meet Your Application Needs

Configurable measurement channels

The U8903B audio analyzer can be configured to 4 or 8 analog analyzer channels. The instrument can simultaneously measure all channels, making the U8903B the ideal choice for multichannel systems such as 5.1 or 7.1 surround sound.



Figure 1. The U8903B's GUI, showing 8 analyzer channel measurements.

1.5 MHz wide bandwidth

The U8903B comes with a wide bandwidth option (N3431A), which expands the analog input bandwidth up to 1.5 MHz, with 24-bit resolution and two-million-point FFT. This option is ideal for looking at the spectrum from Class D amplifiers or switching supplies where frequency components or noise well above the audio band can have a detrimental effect on audio quality. It is also suited to applications where low-frequency spectrum analyzers were previously used. This option is only available for the two front panel analog analyzer channels.

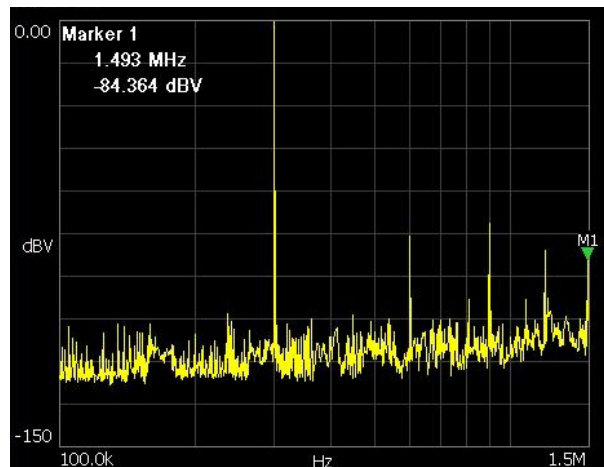


Figure 2. This screenshot shows an FFT plot of a 300 kHz source and the U8903B's unique ability to measure the 5th harmonic with unprecedented resolution.

Voice quality with POLQA

The U8903B audio analyzer now offers the ITU-T standard perceptual objective listening quality assessment (POLQA), which is also known as ITU-T P.863.

POLQA works by comparing a degraded (usually by typical network transmission interferences) or processed signal to the original reference signal. The perceptual differences between the two signals are then rated based on the mean opinion score (MOS) test, which uses a scale from 1 (bad) to 5 (excellent).

POLQA comes with improvements over its predecessor, PESQ (ITU-T P.862), and has been extended to handle higher bandwidth audio signals, supporting measurements in the common audio bandwidth carried by telephone networks (300 Hz to 3.4 kHz) as well as wideband and super-wideband speech signals (up to 14 kHz) needed to assess HD voice quality. With POLQA, the U8903B is suited for testing 4G/LTE and 5G mobile phone network equipment, VoIP phone and network equipment, and HD voice test applications.

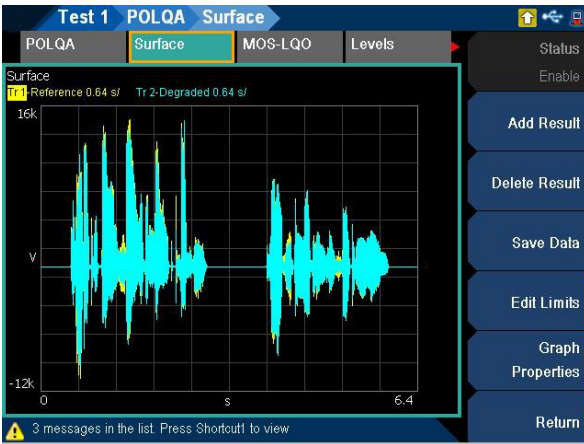


Figure 3. A graph comparison view between the Reference source file and degraded file.

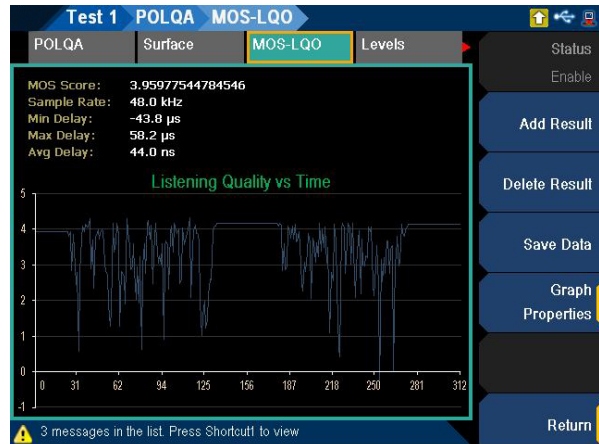


Figure 4. The MOS (Mean Opinion Score) scoring, indicating the rating of the DUT's voice quality.

Advance Your Measurement Testing

Low residual distortion

The U8903B comes with extremely low residual distortion and noise. The residual distortion is -110 dB, enabling the measurement of the most demanding devices. This performance is available for up to 8 channels simultaneously.

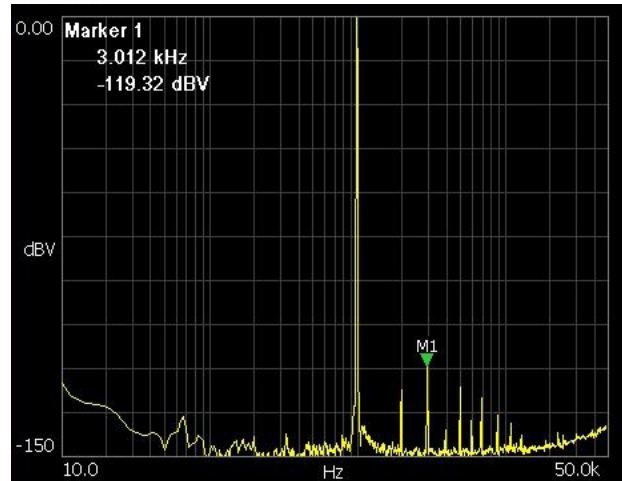


Figure 5. An FFT plot shows the residual distortion

Test sequence control

The built-in test sequencer allows users to create flexible and easy-to-use test sequences that automate testing and provide test reports. This function removes the need to write complicated programming code or to purchase an additional external controller. Users can set up and define the types of measurements and define Pass/Fail decisions, reducing test development time and test time for the device-under-test (DUT). The test sequence function operates with all options and supports voice quality analysis.



Figure 6. The test sequence control function comes with a selection of pre-configured measurements. It allows users to select the most frequently used test sequences for their daily measurement.

True-RMS detection

To accurately characterize signals with high noise content, true-RMS detection is required. The U8903B employs true-RMS detection for all signals with crest factor less than three. In addition, quasi-peak detection (CCIR 468-4) and peak-to-peak detection are also available through softkey selections.

Expand Your Digital Audio Test Capabilities

Cover your application needs with multiple digital audio interfaces

Test a wide range of digital audio applications with the industry's standard interfaces: AES3/SPDIF and Digital Serial Interface (DSI). Used in the testing and validation of consumer electronics and digital audio-related ICs, both digital audio interfaces are available with the U8903B Option DGT. The U8903B also supports multiple DSI formats, such as I2S, Left Justified, Right Justified, and DSP. These formats are suitable for most digital audio design and verification applications.

Measure more applications with a wide logic level input range

The U8903B comes with completely variable logic I/O levels between 1.2 V and 3.3 V, offering the ultimate compatibility with current and future devices. In addition, the U8903B-105 DSI cable (optional accessories) is designed to make connections between the audio analyzer and the DUT extremely simple. The cable provides a convenient connection to the 25-way DSI connector on the rear of the instrument. The other end of the cable offers all the data and clock lines on individual BNC connectors for quick and easy connection to the DUT.

The U8903B also comes with a mode to help customers transition to the new generation of audio analyzers. This mode allows the new U8903B to mimic the legacy audio analyzer, performing measurements and even displaying the same GUI measurement screen as the legacy audio analyzer. For customers currently using the legacy audio analyzer in their test rack, the U8903B also comes with a built-in code emulator that automatically converts the code directly into SCPI commands, the language used by the U8903B.

Product Characteristics

Description	Specifications
Power consumption	≤ 250 VA
Power requirements	100 to 240 V _{ac} 47 to 63 Hz
Operating environment	Operating temperature from 0 to 55 °C Maximum Relative Humidity (non-condensing): 95%RH up to 40 °C, decreases linearly to 45%RH at 55 °C ¹ Altitude up to 3000 m Pollution Degree 2 Installation Category II
Storage compliance	-40 to 70 °C
Safety & EMC ² compliance	Refer to Declaration of Conformity for the latest revisions of regulatory compliance at: www.keysight.com/go/conformity
Instrument dimensions (W x D x H)	425.60 mm (16.76 in) x 425.00 mm (16.73 in) x 133.60 mm (5.25 in)
Connectivity	LAN, GPIB and USB
Weight	8.5 kg

1. From 40 °C to 55 °C, the maximum % Relative Humidity follows the line of constant dew point.
2. This is a sensitive measurement apparatus by design and may have some performance loss when exposed to ambient continuous electromagnetic phenomenon. Measurement Considerations – use shielded or twisted cable, use common mode choke & ferrite clamp.

Analog Generator

Specification and features

The following specifications are based on performance with 30 minutes of warm-up time and a temperature of 0 to 55 °C unless stated otherwise.

Analog generator specifications and features

Output features	
Generated waveforms	Sine, dual sine, variable phase, square, noise (Gaussian and rectangular), arbitrary, DC, multitone, SMPTE IMD (1:1, 4:1, and 10:1), DFD (IEC 60118/IEC 60268), WAV file playback
Connection type	
Balanced	XLR
Unbalanced	BNC
Common mode	XLR
Impedance	
Balanced	40 Ω , 100 Ω , 600 Ω
Unbalanced	20 Ω , 50 Ω , 600 Ω
Common mode	40 Ω , 100 Ω , 600 Ω or 10 Ω unbalanced as per IEC-60268
Grounding	
	True floating or grounded
Maximum output power into 600 Ω	
Balanced (600 Ω)	20 dBm
Unbalanced (600 Ω)	14 dBm
Sine, dual sine, and variable phase	
Dual sine ratio range	0 to 100%
Phase	-180 to 179.99°
Sweep	Frequency, amplitude, phase
Frequency	
Range	5 Hz to 80 kHz
Accuracy	\pm (2 ppm + 100 μ Hz)
Resolution	0.1 Hz
Output	
Range (balanced)	0 to 16 V_{rms}
Range (unbalanced/common)	0 to 8 V_{rms}
Current limit (typical)	50 mA
Amplitude accuracy at 1 kHz	\pm 0.09 dB (\pm 1%) (from 0 to 55 °C)
Amplitude resolution	1 μV_{rms} (limited to five digits of resolution)
Flatness Ref 1 kHz	
5 Hz to 20 kHz	\pm 0.008 dB
20 kHz to 80 kHz	\pm 0.08 dB

Specification and features (Cont.)

Analog generator specifications and features

THD and THD+N	
Residual THD + N at 1 kHz, 1 V _{rms} (20 Hz to 20 kHz bandwidth)	≤ -108 dB, < -110 dB (at 23 ± 5 °C) ¹ (typical) ≤ -100 dB (from 0 to 55 °C) ¹
Residual THD at 1 kHz, 1 V _{rms} (20 Hz to 20 kHz bandwidth)	≤ -111 dB, ≤ -116 dB (at 23 ± 5 °C) ¹ (typical) ≤ -103 dB (from 0 to 55 °C) ¹
Residual THD, 5 Hz to 25 KHz, 0.32, 1, 3.2, 10 V _{rms}	< -85 dB (at 23 ± 5 °C) ²
Residual THD, 25 KHz to 50 KHz, 0.32, 1, 3.2, 10 V _{rms}	< -77 dB (at 23 ± 5 °C) ²
Residual THD, 50 KHz to 70 KHz, 0.32, 1, 3.2, 10 V _{rms}	< -67 dB (at 23 ± 5 °C) ²
Residual THD, 70 KHz to 80 KHz, 0.32, 1, 3.2, 10 V _{rms}	< -85 dB (at 23 ± 5 °C) ²

1. Includes contributions from Generator and Analyzer. Individual contributions are typically less than the values stated.
2. Residual THD is calculated based on up to the 9th harmonic.

Crosstalk	
≤ 20 kHz	≤ -130 dB + 0.1 μV (typical)
Square	
Frequency range	5 Hz to 30 kHz
Rise time	< 2 μs
Output	
Range (balanced)	0 to 45.2 V _{pp}
Range (unbalanced/common)	0 to 22.6 V _{pp}
Amplitude accuracy at 1 kHz	± 1%
SMPTE IMD (1:1/4:1/10:1)	
Mixed ratio (LF: HF)	10:1, 4:1, or 1:1
Residual IMD (20 Hz to 20 kHz)	≤ -95 dB (at 23 ± 5 °C) (typical), ≤ -90 dB (from 0 to 55 °C) (typical)
Sweep	Upper frequency, lower frequency, amplitude
Frequency	
Low frequency (LF) tone	40 to 500 Hz
High frequency (HF) tone	2 to 60 kHz
Output	
Range (balanced)	0 to 16 V _{rms}
Range (unbalanced/common)	0 to 8 V _{rms}
DFD (IEC 60118/IEC 60268)	
Inherent distortion (20 Hz to 20 kHz)	≤ -106 dB at 1 V _{rms} (typical)
Sweep	Upper frequency, center frequency, amplitude
Frequency	
Difference frequency	80 Hz to 2 kHz
Upper frequency	3 to 80 kHz
Center frequency	3 to 79 kHz
Output	
Range (balanced)	0 to 16 V _{rms}
Range (unbalanced/common)	0 to 8 V _{rms}

Specification and features (Cont.)

Analog generator specifications and features

Noise	
Type	Gaussian, rectangular, pink
Output	
Range (balanced)	0 to 7.2 V _{rms} (Gaussian), 0 to 10 V _{rms} (Rectangular), 0 to 7.2 V _{rms} (Pink)
Range (unbalanced/common)	0 to 3.6 V _{rms} (Gaussian), 0 to 5 V _{rms} (Rectangular), 0 to 3.6 V _{rms} (Pink)
Arbitrary	
Signal	Determined by the user selected file
Sample rate	192 kHz
Length	Up to 5 minutes, depending on waveform file
Multitone	
Signal	Determined by the user-specified frequency, amplitude, and phase data
Sample rate	192 kHz
Length	1024 to 65536 points/channel
Maximum number of tones	64
WAV file playback	
Type of file	.WAV file
Sample rate	192 kHz
Length	Up to 5 minutes, depending on waveform file
DC output	
Range (balanced)	-22.6 to 22.6 V
Range (unbalanced/common)	-11.3 to 11.3 V
Amplitude accuracy	± 1%
DC offset	
Applicable for all waveform types except variable phase, DC, and square	
Output level	
Range	-11.3 to 11.3 V
Amplitude accuracy ¹	± 1.5% (± 250 mV to ± 11.3 V)

1. DC output and DC offset output are functional from 0 to ± 250 mV. The amplitude accuracy for this range is not warranted.

Analog Analyzer

Specifications and features

Analog analyzer specifications and features

Input specifications	
Frequency range	10 Hz to 96 kHz ²
Coupling	DC, AC
Input ranges	320 mV _{rms} to 140 V _{rms} ³ (unbalanced) 320 mV _{rms} to 300 V _{rms} ³ (balanced)
Measurement range ¹	< 1 μV _{rms} ⁴ to 300 V _{rms}
Maximum rated input	200 V _p for altitude up to 3000 m
Input protection	Overload protection for all ranges, onscreen warning message on the front panel
Connection type	
Balanced	XLR
Unbalanced	BNC
Measurement bandwidth	
Bandwidth	96 kHz ²
Impedance	
Balanced	300 Ω (3 W max), 600 Ω (1.5 W max), 200 kΩ
Unbalanced	300 Ω (3 W max), 600 Ω (1.5 W max), 100 kΩ
CMRR	
≤ 20 kHz (input range ≤ 3.2 V)	≥ 80 dB ⁵ (typical)
≤ 20 kHz (input range > 3.2 V)	≥ 50 dB ⁵ (typical)
Crosstalk	
≤ 20 kHz	≤ -140 dB + 0.1 μV (typical)
<p>1. Maximum input range of 300V_{rms} only apply for balance input, in equivalence to ±150V_{rms} from each phase to ground</p> <p>2. Accuracy deteriorates as the measurement tends towards the Nyquist frequency of 96 kHz. Full performance can be expected ≤ 95.9 kHz.</p> <p>3. For the available input ranges, refer to the U8903B User Guide.</p> <p>4. Defined by the 24-bit measurement.</p> <p>5. When AC coupled, CMRR will deteriorate at low frequencies</p>	
THD + N and SINAD	
Display range	-999.999 dB to 0 dB
Accuracy	
20 Hz to 20 kHz	± 0.5 dB @ 0.32 V, 1 V, 3.2 V, 10 V, 32 V, 100 V, 140 V
< 96 kHz ¹	± 0.7 dB @ 0.32 V, 1 V, 3.2 V, 10 V, 32 V, 100 V, 140 V
Input voltage range	< 1 μV _{rms} to 140 V _{rms}
3 dB measurement bandwidth	Measurement bandwidth 96 kHz
Detection	RMS
Residual THD + N at 1 kHz, 1 V _{rms} (20 Hz to 20 kHz bandwidth)	≤ -108 dB, ≤ -110 dB (at 23 ± 5 °C) ² (typical) ≤ -100 dB (from 0 to 55 °C)
Residual THD at 1 kHz, 1 V _{rms} (20 Hz to 20 kHz bandwidth)	≤ -111 dB, ≤ -116 dB (at 23 ± 5 °C) ² (typical) ≤ -103 dB (from 0 to 55 °C)
Residual noise 20 Hz to 20 kHz bandwidth	≤ 1.3 μV _{rms}

Specifications and features (Cont.)

Analog analyzer specifications and features

SNR	
Display range	0 to 999.999 dB
Accuracy	
20 Hz to 20 kHz	± 0.5 dB @ 0.32 V, 1 V, 3.2 V, 10 V, 32 V, 100 V, 140 V
< 96 kHz ¹	± 0.7 dB @ 0.32 V, 1 V, 3.2 V, 10 V, 32 V, 100 V, 140 V
Input voltage range	< 1 μ V _{rms} to 140 V _{rms}
Triggering	
Type	Free Run, External
Level	5 V
Minimum trigger high voltage	1.25 V
Maximum trigger low voltage	0.5 V
Input impedance	> 10 k Ω
Amplitude	
DC measurement range	0 to ± 200 V
DC accuracy	$\pm 1\%$ @ 0.32, 1V, 3.2 V, 10 V, 32 V, 100 V, 140 V
AC accuracy (at 1 kHz)	0.03 dB (0.35%) (at 23 \pm 5 °C)
	0.05 dB (0.58%) (from 0 to 55 °C)
Flatness Ref 1 kHz	
20 Hz to 20 kHz	± 0.008 dB (typically < ± 0.003 dB)
20 kHz to 80 kHz	± 0.08 dB
≤ 96 kHz	± 0.1 dB
AC level detection	RMS, Peak-to-Peak
Frequency	
Range	10 Hz to 96 kHz ¹
Minimum input	1 mV (S/N > 40 dB)
Accuracy	$\pm (2 \text{ ppm} + 100 \mu\text{Hz})$ (≤ 50 kHz)
	± 5 ppm (> 50 kHz)
Resolution	5 digits
<p>1. Accuracy deteriorates as the measurement tends towards the Nyquist frequency of 96 kHz. Full performance can be expected ≤ 95.9 kHz.</p> <p>2. Includes contributions from generator and analyzer. Individual contributions are typically less than the values stated.</p>	
Phase accuracy	
20 Hz to 20 kHz	$\pm 2^\circ$
< 96 kHz ¹	$\pm 4^\circ$
Minimum input	1 mV (S/N > 40 dB)
Resolution	0.01°
SMPTE IMD	
Residual IMD	$\leq 0.0018\%$ (≤ -95 dB) (typical)
DFD (IEC 60118/IEC 60268)	
Inherent distortion (20 Hz to 20 kHz)	≤ -106 dB at 1 V _{rms} (typical)

1. Accuracy deteriorates as the measurement tends towards the Nyquist frequency of 96 kHz. Full performance can be expected ≤ 95.9 kHz

Analog audio filters

Analog audio filters

Low pass filter	
	2 kHz, 3 kHz, 5 kHz, 8 kHz, 10 kHz, 10 kHz, 20 kHz, 22 kHz, 30 kHz, 40 kHz, 50 kHz, 80 kHz
High pass filter	
	15 Hz, 20 Hz, 22 Hz, 30 Hz, 50 Hz, 70 Hz, 100 Hz, 200 Hz, 300 Hz, 400 Hz
Weight filter	
	A weighting (ANSI-IEC "A" weighted, per IEC Rec 179) CCIR 1 K weighted (CCIR Rec 468) CCIR 2 K weighted (Dolby 2 K) C-Message (C-Message per IEEE743) De-emphasis (50 μ s, 75 μ s) CCITT (ITU-T Rec. 041, ITU-T Rec. P.53) User-defined ¹

1. User-defined filters can be uploaded through standard I/O connections.

Sweep

Sweep

Generator sweep	
Parameters	Frequency, amplitude, phase
Sweep spacing	Linear, logarithmic
Sweep mode	Auto sweep, auto list
Hold	None, max, min

Audio monitor

Audio monitor

Auxiliary	
Monitor output	Scaled to give 1 V _{rms} at the top of each analyzer input range
Aux output	0.5 to 5.1 Vdc (\pm 5%), current limited to 100 mA
Headphone connector	
Recommended headphone	Headphone with 3.5 mm connector

Graph features

Graph features

FFT analyzer	
Size/acquisition length	2048, 4096, 8192, 16384, 32768, 65536, 131072, 262144, 524288, 1M, 2M
Window	Rectangular, Hanning, Hamming, Blackman-Harris, Rife-Vincent 1 and 3, flat top, Kaiser
Amplitude accuracy (flat top window)	\pm 0.1 dB (\pm 1.2%)

1.5 MHz bandwidth (Option N3431A)

1.5 MHz bandwidth (Option N3431A)

Input specifications	
Fundamental frequency range	10 Hz to 1.5 MHz
Frequency accuracy	± 2 ppm (> 50 kHz) (with Sample Size ≥ 1 M)
Measurement bandwidth	
Bandwidth	1.5 MHz
Flatness Ref 1 kHz	
≤ 200 kHz	± 0.1 dB
≤ 1 MHz	± 0.5 dB
≤ 1.5 MHz	± 1.0 dB
Residual THD	
Residual THD at 80kHz, 0.32, 1, 3.2, 8Vrms	≤ -80 dB, ≤ -85 dB (typical), (18 - 28 °C)

POLQA measurement (Option N3432A), licensed by OPTICOM GmbH

Perceptual Objective Listening Quality Assessment (in line with ITU-T Rec. P.863)

Numeric results	POLQA score MOS-LQO narrowband and wideband average only
Graphic display (versus time)	POLQA score, MOS-LQO, delay, dropouts, reference signal, and degraded signal

Digital generator features

Digital generator features

Sine, dual sine, and variable phase

Frequency

Range	5 Hz to 0.45 sampling rate (Fs)
Accuracy	± 10 ppm
Flatness	± 0.001 dB
Residual THD + N	≤ -140 dB

Square

Frequency range	5 Hz to 0.45 Fs
-----------------	-----------------

SMPTE IMD (1:1/4:1/10:1)

Frequency

Low frequency (LF) tone	40 to 500 Hz
High frequency (HF) tone	2 to 60 kHz, or 0.45 Fs (whichever is lower)
Mixed ratio (LF: HF)	10:1, 4:1, or 1:1
Sweep	Upper frequency, lower frequency, and amplitude

DFD (IEC 60118/IEC 60268)

Frequency

Difference frequency	80 Hz to 2 kHz
Upper frequency	3 to 80 kHz, or 0.45 Fs (whichever is lower)
Center frequency	3 to 79 kHz, or 0.45 Fs (whichever is lower)
Sweep	Upper frequency, lower frequency, and amplitude

Noise

Type	Rectangular, Gaussian, Triangular, and Pink
Amplitude	0 to 1 FFS

Arbitrary

Signal	Determined by the user selected file
File format	WAVE (.wav)
Maximum file size	5.0 MB
File resolution	8, 16, or 24 bits
Frequency range	2 Hz to 0.45 Fs

Multitone

Signal	Determined by the user-specified frequency, amplitude, and phase data
Frequency rate	2 Hz to 0.45 Fs
Maximum number of tones	64

1. Digital generator specifications refer to 24 bits FFS

Sine burst

Period	2 cycles to 65535 cycles
Burst on	1 cycle to (65534 or period - 1, whichever is lower)
Burst on to burst off ratio	0 to 100%

Monotonicity

Samples/step	1 to 32768
--------------	------------

Walking one and walking zero

Samples/step	1 to 65535
--------------	------------

Constant value

Amplitude	-1 FFS to 1 FFS
-----------	-----------------

DC offset

DC offset	-1 FFS to 1 FFS
-----------	-----------------

Dither

Distribution	None, triangular, or rectangular
Level	0.5 LSB

AES3/SPDIF interface features

AES3/SPDIF interface features

Output specifications	
Output connector type	
Balanced	XLR (transformer coupling)
Unbalanced	BNC (grounded)
Optical	TOSLINK connector
Output impedance	
Balanced	110 Ω
Unbalanced	75 Ω
Output level	
Balanced	0.3 to 5.1 V _{pp}
Unbalanced	0.3 to 2.5 V _{pp}
Sampling rate	28 to 192 kHz
Sampling rate accuracy	± 5 ppm
Output level accuracy	± 1 dB (typical)
Audio bit	8 bits to 24 bits
Inherent jitter (typical)	
Balanced	≤ 1.5 ns
Unbalanced	≤ 1.5 ns
Optical	≤ 5 ns
Clock and sync	
Internal master clock	
Maximum clock rate	192 kHz
Accuracy	± 5 ppm
Inherent jitter	≤ 1 ns (typical)
Sync clock output	
Connector type	25-pin female D-SUB connector pin-1
Impedance	50 Ω
Output level	3.3 V (LVCMOS IO standard)
Polarity	Normal or invert
Output type	Bit clock (128 Fs)
Protocol	
Channel status bits	Professional or consumer (all applicable bits are editable for advanced settings)
Format	Professional or consumer
User bits	Set or cleared
Validity flag	Set or cleared

DSI features

DSI features

Output features	
Output connector type	25-pin female D-SUB connector 25-pin male D-SUB to BNC connector (optional accessories)
Output impedance	50 Ω
Logic level	1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V, or user defined (LVCMOS standard)
Sampling rate	6.75 kHz to 400 kHz
Sampling rate accuracy	± 5 ppm
Master-clock	
Multiplier	64 to 1024 (depends on the Word Length)
Maximum frequency	51.2 MHz
Maximum bit clock	51.2 MHz
Maximum sampling rate	400 kHz
Data format	Left Justified, Right Justified, I2S, or DSP
Word length	8 bits to 32 bits per channel
Audio bit	8 bits to 24 bits (step by 1 bit)
Word clock rate	6.75 kHz to 400 kHz
Clock and sync	
Internal master clock	
Maximum clock rate	10 MHz
Accuracy	± 5 ppm
Inherent jitter	≤ 1 ns (typical)
Clock source setting (analyzer and generator)	
	Incoming bit clock from DUT
	Internal clock
	External clock from the external sync clock input
DSI clock output	
Impedance	10 k Ω typical
Output level	1.2 to 3.3 V _{pp}
Polarity	Normal or invert
Word clock polarity	
	Leading-edge or falling edge (with respect to bit clock)

Ordering Information

Product model	Description
U8903B-STD	Performance audio analyzer, 2 channels
Measurement channel options	
U8903B-AN4	Analog analyzer, 4 channels
U8903B-AN8	Analog analyzer, 8 channels
U8903B-DGT	Digital audio card
Bundling options ¹	
U8903B-201	Performance audio analyzer with 4 analog analyzer channels, digital audio (AES3/SPDIF and DSI digital audio). This bundle option is suitable for consumer audio or automotive infotainment system test.
U8903B-212	Performance audio analyzer; 2 channels with 50-ohm impedance. This bundle option is suitable for consumer audio tests.
Note:	
1. The bundle options include U8903B-STD and other options. They are designed for some common applications or required by some specific customers.	
Optional software	
N3431A	Wide bandwidth option -1.5 MHz (fixed perpetual license)
N3432A	POLQA measurement software (fixed perpetual license)
Optional accessories	
11500A	Cable assembly, Type-N (male) to Type-N (male), DC to 6.0 GHz
U8903A-101	Male BNC to male BNC cable; 1.2 m
U8903A-102	Male BNC to male RCA cable, 2 m
U8903A-103	Male XLR to female XLR cable; 2 m
U8903A-908	Rackmount kit
U8903B-105	Cable, digital serial interface for DSI input and output connection
U8903A-107	Cable, accessory – Male XLR-2 male BNC analyzer, 0.26 m
U8903A-108	Cable, accessory – Female XLR-2 male BNC generator, 0.26 m
U8903A-109	BNC accessory kit
Warranty and services	
U8903B-1A7	ISO17025 compliant calibration with test data
U8903B-A6J	ANSI Z540 compliant calibration with test data

cdma2000 is a US registered certification mark of the Telecommunications Industry Association.

Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at www.keysight.com.



This information is subject to change without notice. © Keysight Technologies, 2018 – 2024, Published in USA, August 23, 2024, 5991-4551EN